






CHARACTERISTICS

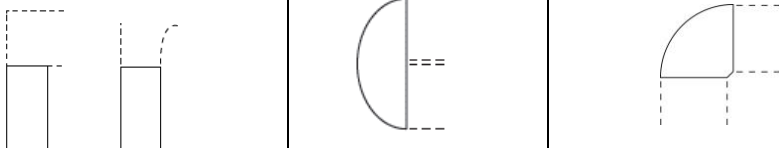
INDIVIDUAL DESKS

<p>WORKTOPS</p> 	<p>Melamine covered particle board panels 25 mm thick. 2 sides treated with an anti-reflective coating Panel density 600-670 kg/m³ Bonded ABS edge banding 2 mm thick, rounded on upper and lower edges. Edge banding to match worktop finish</p> <p>Panels sourced from sustainably managed forests (PEFC). Fire rating M3 (combustible, moderately flammable) in accordance with the standard NF EN 13501-1 Panels are certified E1 (control of formaldehyde emissions), emitting 6.5 mg HCNO/100 mg and compliant with standard NF EN 717-2</p> <p>Melamine panels comply with the standard ISO 22196 for antibacterial properties.</p> <p>> Worktops predrilled in 2 places for optional cable ports ø 80 mm (one place for worktop L. 80 mm) No predrilling for returns and extensions</p> <p>> Different worktop shapes (see summary)</p>
<p>MELAMINE PANEL LEG</p> 	<p>Melamine panel leg</p> <ul style="list-style-type: none"> > Particle board panels, 25 mm thick. > 2 ABS cross-braces in Aluminium grey in the upper section > Adjustable stabiliser feet with adjustment through 15 mm <p>Worktop secured to the melamine modesty board structure by screws and screwed metal M6 inserts Fixed leg: worktop height 735 mm</p>
<p>L-SHAPED LEG</p> 	<p>L-shaped melamine column leg</p> <ul style="list-style-type: none"> > Particle board panels, 25 mm thick. > Plate and base in Aluminium grey finish > Adjustable stabiliser feet with adjustment through 15 mm <p>Worktop secured to the melamine modesty board structure by screws and screwed metal M6 inserts Fixed leg: worktop height 735 mm</p>
<p>TUBULAR SUPPORT LEG</p> 	<p>Tubular support leg, round</p> <p>Compatible with 90° asymmetric compact workstations without juxtaposed desk-height pedestal on the return side, and with extensions</p> <p>Welded metal leg, lacquered epoxy Aluminium grey</p> <ul style="list-style-type: none"> > 1 plate secured to the underside of the worktop using 4 screws and welded to the tube > 1 tubular leg ø 60 mm > Stabiliser feet with a 15 mm adjustment range for levelling, in black injected polypropylene <p>Fixed leg: worktop height 735 mm</p>
<p>ASSEMBLY SYSTEM</p>	<p>Assembly of the legs</p> <p>Legs joined together by the structural melamine modesty board which provides stability and rigidity to desks and worktops</p> <ul style="list-style-type: none"> > Rectangular melamine modesty board 25 mm thick, matched to desktop finish > Overall dimensions D. 25 x H. 300 mm > Opening at the top at each extremity ø 60 mm with ABS ring in Aluminium grey, allowing cables to run from the worktop to the structure > The modesty board can accommodate an optional metal cable trough for the passage of cables and storage of socket outlets > Secured to the legs by screws and cam lock nuts <p>Attachment of structure to worktop:</p> <p>Attached using screwed metal inserts to simplify assembly and disassembly while providing excellent structural rigidity (140 kg per insert under test conditions)</p>



DIMENSIONS

OVERALL DIMENSIONS (in mm)			
Individual desks	RECTANGULAR	90° ASYMMETRICAL COMPACT DESKS	
			
	Depth	800	1200 (Return D. 600 mm)
	Width	800 / 1200 / 1400 / 1600 / 1800	1600 / 1800
Fixed leg height	735	735	

Returns and extensions	RECTANGULAR FIXED RETURNS	HALF-MOON TABLE	90° CORNER ANGLE UNIT	
				
	Depth	600	600	800
	Width	800 / 1200	1650	800
Fixed leg height	735	735	735	

